

Door to Door Intermodal Container & Trailer Specifications



EMP Container Specifications	53' EMHU
Inside Width	99 3/8"
Inside Height	109 1/2"
Overall Length	53'
Inside Length	52' 6 11/16"
Door Opening Height	109 1/2"
Door Opening Width	99"
Gross Weight Rating	67,200 lbs.
Tare Weight	10,200 lbs.
Fork Lift Truck Rating (floor strength)	24,000 lbs.
Cubic Capacity (cubic feet)	3,970
Walls	Wood
Floor	Wood
Primary Use	Bulk Freight



45 ft. Container	Steel Construction / ISO
Outside Dimensions	45' 0" L x 8' 0" W x 9' 6" H
Inside Dimensions	44' 5 23/32" L x 7' 8 19/32" W x 8' 10 3/16" H
Door Opening	7' 8 1/8" W x 8' 6 5/32" H
Cubic Capacity	3,038 cu. ft.
Payload Weight	62,600 lbs.
Tare Weight	10,200 lbs.
Gross Weight	72,800 lbs.
Floor Rating	12,000 Forklift Front Axle
Side Vents	Yes
Tie Downs	Yes



40 ft. High Cube Container	Steel Construction / ISO
Outside Dimensions	40' 0" L x 8' 0" W x 9' 6" H
Inside Dimensions	39' 5 11/16" L x 7' 8 1/2" W x 8' 10 3/16" H
Door Opening	7' 8 5/16" W x 8' 5 11/16" H
Cubic Capacity	2,693 cu. ft.
Payload Weight	58,600 lbs.
Tare Weight	8,600 lbs.
Gross Weight	67,200 lbs.
Floor Rating	12,000 Forklift Front Axle
Side Vents	Yes
Tie Downs	Yes




40 ft. Container	Steel Construction / ISO
Outside Dimensions	40' 0" L x 8' 0" W x 8' 6" H
Inside Dimensions	39' 5 11/16" L x 7' 8 1/2" W x 7' 10 3/16" H
Door Opening	7' 8 5/16" W x 7' 5 11/16" H
Cubic Capacity	2,389 cu. ft.
Payload Weight	59,000 lbs.
Tare Weight	8,200 lbs.
Gross Weight	67,200 lbs.
Floor Rating	12,000 Forklift Front Axle
Side Vents	Yes
Tie Downs	Yes




20 ft. Container	Steel Construction / ISO
Outside Dimensions	19' 10 1/2" L x 8' 0" W x 8' 6" H
Inside Dimensions	19' 4 1/4" L x 7' 8 1/2" W x 7' 10 5/16" H
Door Opening	7' 8 3/16" W x 7' 5 11/16" H
Cubic Capacity	1,172 cu. ft.
Payload Weight	48,020 lbs.
Tare Weight	4,890 lbs.
Gross Weight	52,910 lbs.
Floor Rating	12,000 Forklift Front Axle
Side Vents	Yes
Tie Downs	Yes



53 ft. Fixed Chassis	
Dimensions	53' 8" L x 8' 0" W x 4' 0" H
Tare Weight	7,450 lbs.
Tandem Location	54" - 150"
King Pin Location	36"
Landing Gear Location	94"

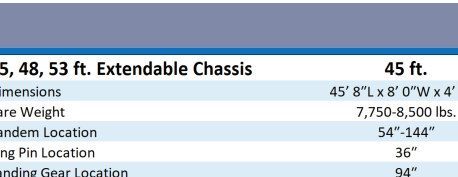

45, 48, 53 ft. Extendable Chassis	45 ft.	48 ft.	53 ft.
Dimensions	45' 8" L x 8' 0" W x 4' 0" H	48' 8" L x 8' 0" W x 4' 0" H	53' 8" L x 8' 0" W x 4' 0" H
Tare Weight	7,750-8,500 lbs.	7,750-8,500 lbs.	7,750-8,500 lbs.
Tandem Location	54"-144"	54"-144"	54"-144"
King Pin Location	36"	36"	36"
Landing Gear Location	94"	94"	94"

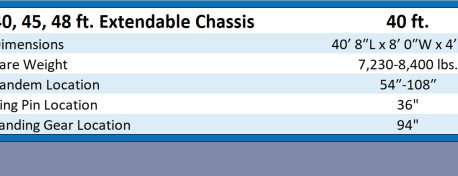


40, 45, 48 ft. Extendable Chassis	40 ft.	45 ft.	48 ft.
Dimensions	40' 8" L x 8' 0" W x 4' 0" H	45' 8" L x 8' 0" W x 4' 0" H	48' 8" L x 8' 0" W x 4' 0" H
Tare Weight	7,230-8,400 lbs.	7,230-8,400 lbs.	7,230-8,400 lbs.
Tandem Location	54"-108"	54"-108"	54"-108"
King Pin Location	36"	36"	36"
Landing Gear Location	94"	94"	94"



40 ft. Fixed Chassis	
Dimensions	40' 8" L x 8' 0" W x 4' 0" H
Tare Weight	6,500 lbs.
Tandem Location	54"
King Pin Location	30"
Landing Gear Location	94"



20 ft. Slider Chassis	
Dimensions	23' 8" L x 8' 0" W x 4' 0" H
Tare Weight	6,600 lbs.
Tandem Location	54"
King Pin Location	18"
Landing Gear Location	84"



InTek Freight & Logistics Inc.
Technology Driven Road & Rail Solutions

317-208-5565 | www.intekfreight-logistics.com